

ACCENT D2- MODEL: ELD2

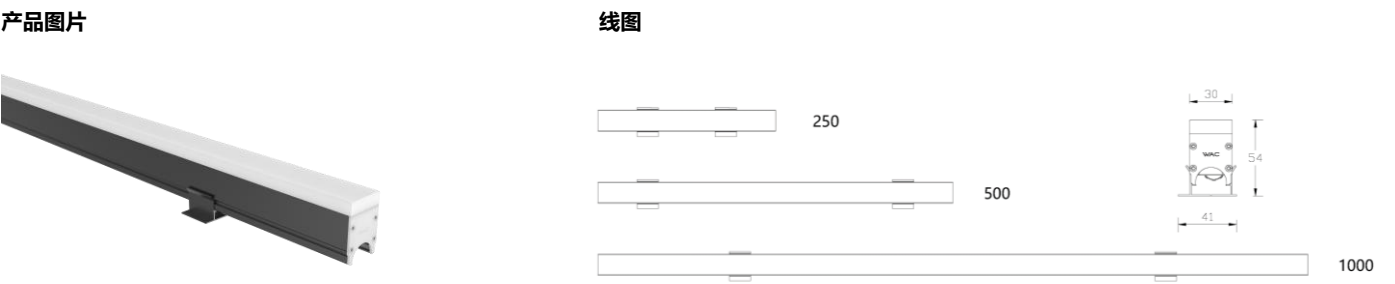
Linear Luminaires

WAC LIGHTING

Responsible Lighting®

项目名称:

灯位号:



产品描述

Accent 系列灯具使用高光效，寿命长的光源，采取等间距排布设计，保证了均匀的出光效果，无阴影。Accent 线性灯具符合 LEED 户外照明功耗设计的要求，整洁轻巧的外观确保轻松装配到外墙。Accent 灯具配备柔性电缆，可自由选择侧面或底部出线，满足项目需求。灯具支持 DMX512 调光控制，带自动编址功能；整灯 IP66 的防护等级，可广泛应用于各种建筑照明等。

产品特性

- 主体材质：铝合金灯体，PC 端盖
- 光学系统：三面 PC 扩散罩
- 表面处理：静电粉末喷涂
- 投射方向：/
- 配件/支架：铝合金固定支架
- 安规认证：/
- 防护等级：IP66
- 绝缘等级：Class III
- 环境温度：-20℃~50℃

产品规格

- 光源类型：SMD
- 光源功率：16W (Max) /1000mm
- 光源光通量：2700K 1660lm /3000K 1720lm /4000K 1760lm
- 光源寿命：>50000h-L70 /B10-Ta25℃(LM-80/TM-21)
- 色温/显指：2700K / 3000K / 4000K ， Ra80；RGBW，白光可调
- 光源色容差：3 SDCM (MONO) , 5 SDCM (RGBW)
- 输入电压：24V/DC
- 调光控制：ON-OFF 或 DMX512 调光控制
- 产品重量：约 1.16Kg，不含包装

订购模型

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	Beam	Phase Controller (m)	CCT	Finish
ELD203-04	250	4(Max)	18	134	ET ON-OFF 24V DC Power Supply	P 三面发光	0 W/O Phase	27 2700K 30 3000K 40 4000K	BK Black
ELD205-08	500	8(Max)	36	267					
ELD210-16	1000	16(Max)	72	534					

示例：ELD210-16ET-P027BK

ACCENT D2- MODEL: ELD2

Linear Luminaires

WAC LIGHTING

Responsible Lighting®



项目名称:

灯位号:

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	Phase Controller (m)	CCT	Finish
ELD203-04	250	4(Max)	18	134	MT DMX512 Dimming 24V DC Power Supply	P 三面发光	1 1 Phase B 12 Phase	27 2700K 30 3000K 40 4000K F3 RGBW W=3000K F4 RGBW W=4000K F6 RGBW W=5700K CC TUNNABLE WHITE	BK Black
ELD205-08	500	8(Max)	36	267					
ELD210-16	1000	16(Max)	72	534					

示例: ELD210-16MT-P127BK

配件

Item	Description	Pic	Description Dimensions	Quantity Suggested
ELF5-PC-CT002F	ON-OFF Female connector			1 pc per 10m
ELF5-PC-CT002M	ON-OFF Male connector			1 pc per 10m
ELF5-CC-CT002F	DMX512 Dimming Female connector			1 pc per 10m
ELF5-CC-CT002M	DMX512 Dimming Male connector			1 pc per 10m

配光曲线3000K数据

